

**Rain Sensor  
(Right Hand Exit shown)**

- Fall of rain sensor will be away from the top of curb at 12" : 12" incline (45° angle to the horizon)
- Adjustable mounting bracket powder coated to external skylight color
- 4 core cable (black)
- Cable glands (black)
- Second gland is for external keypad (if purchased)

**GLAZING VISION STANDARD SLIDING OVER FIXED  
ELECTRICALLY OPERATED SLIDING SKYLIGHT**


When a rain sensor is required the customer is to specify a mounting position at the time of order to maximize exposure to the elements and avoid being in the rain shadow of the building.

There are 2 positions for the rain sensor. Either fixed to skylight (position 1) or externally mounted with flying lead (position 2).



External keypads are always remotely mounted and supplied with flying leads.

**NOTE: The rain sensor and keypad are optional extras.**

**Plan view of  
Right Hand Exit  
Sliding Over Fixed**

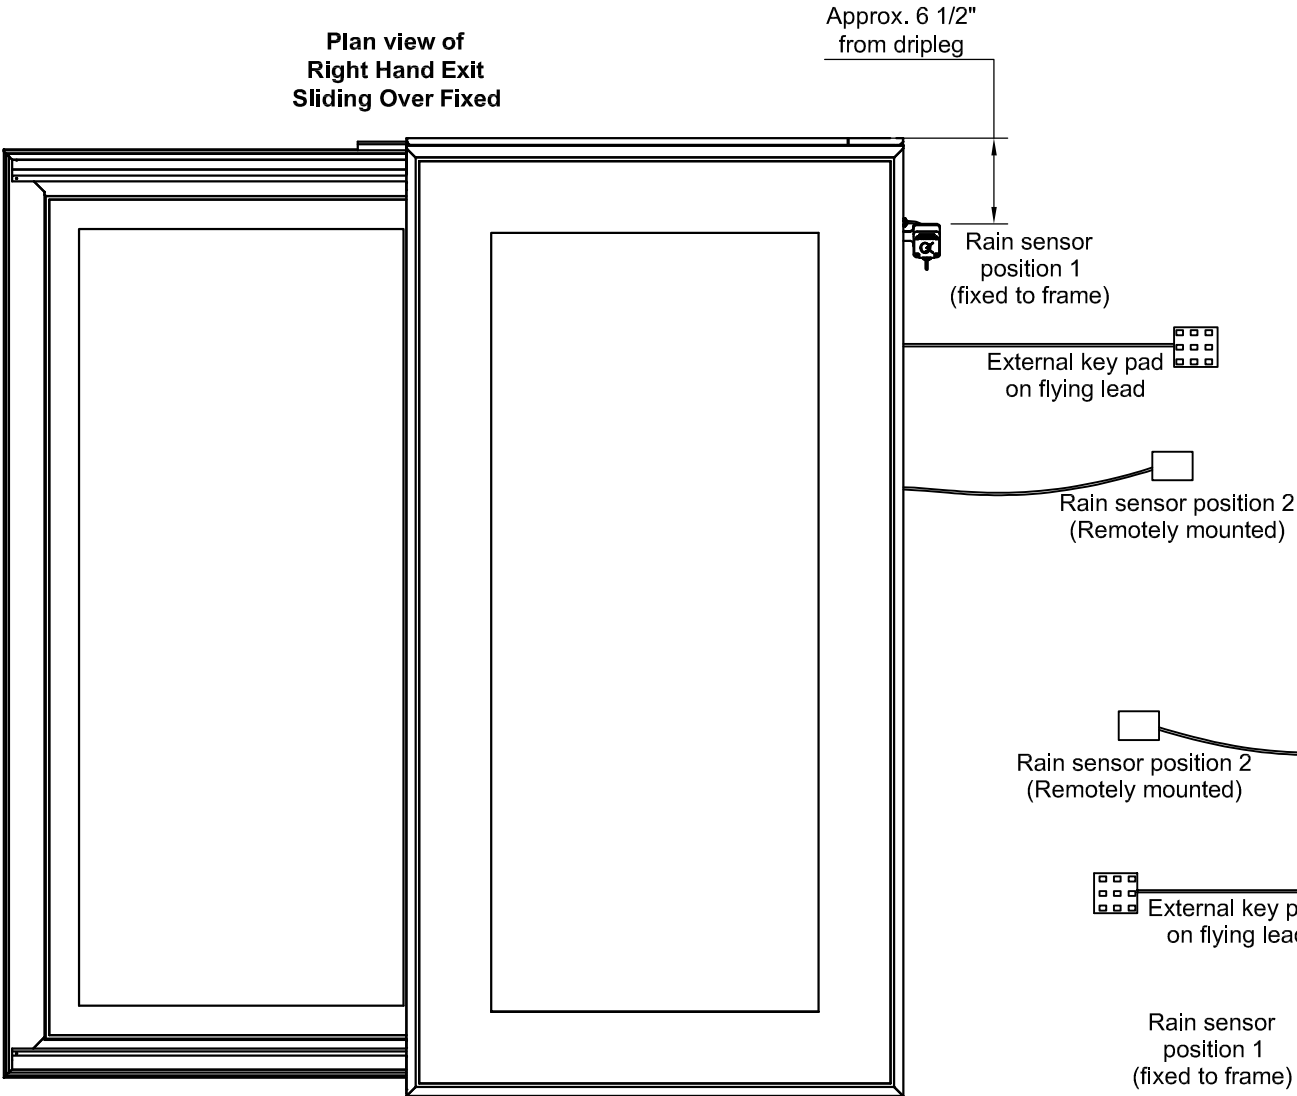

**Plan view of  
Left Hand Exit  
Sliding Over Fixed**

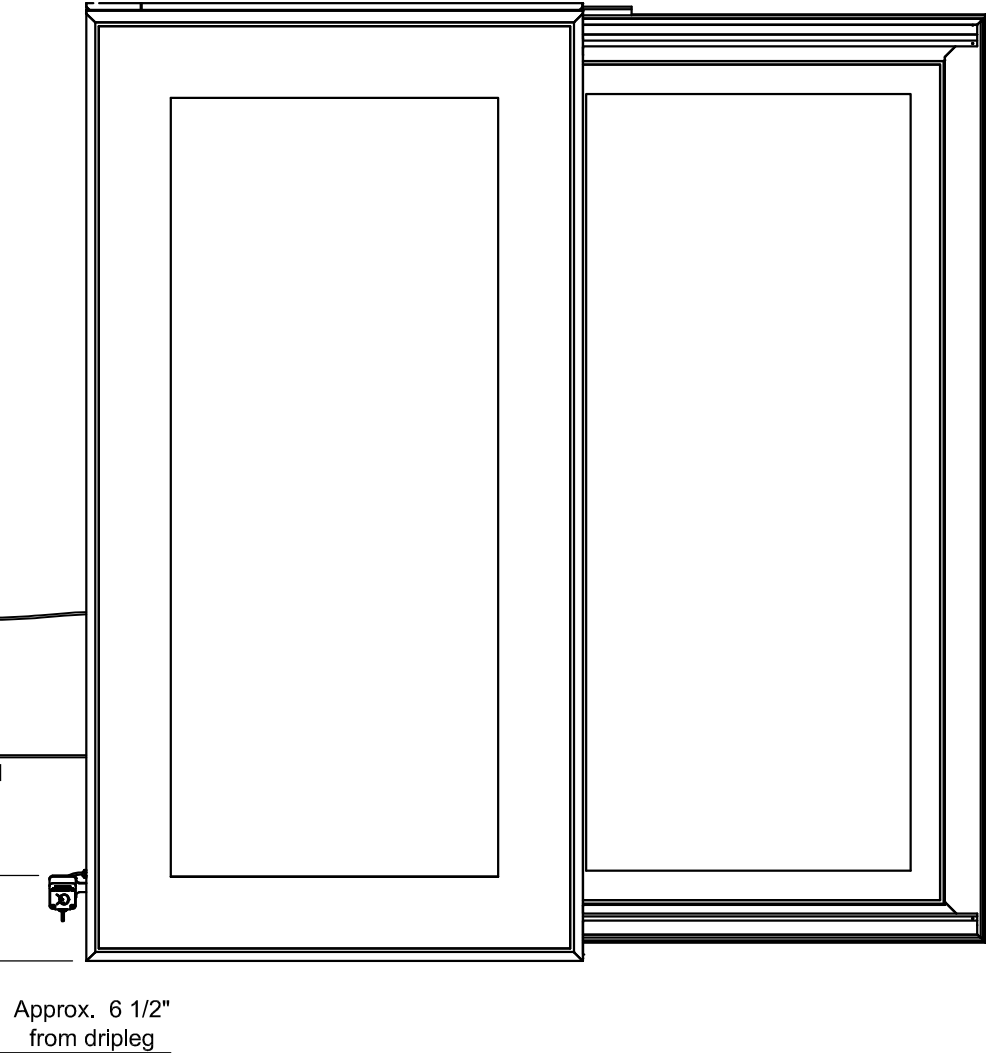

Third angle projection unless otherwise stated

THIS IS A STANDARD DRAWING, THE UNIT PURCHASED MAY VARY. THIS DRAWING DOES NOT INDICATE ACCURATE DIMENSIONS FOR ANY EXISTING STRUCTURAL COMPONENTS OR PRODUCTS.

DO NOT USE THIS DRAWING FOR ANY SITE LAYOUTS. ON-SITE PERSONNEL ARE RESPONSIBLE TO CONFIRM DRAWINGS VS SPECIFIC SITE CONDITIONS.

ESTIMATED WEIGHT		SCALE
N/A		Not to scale

REVISION	DESCRIPTION	NAME/DATE
-	Initial Release	JSL 17/Dec/2020

PROJECT		
Sliding Over Fixed		
TITLE / DESCRIPTION		CHECKED
Rain Sensor and External Keypad Positions		AB
DRAWING NO.		SHEET
603-SDD-US-002		1 OF 1