Refer to drawing 603-SDD-US-005 for:
Detail B
Detail C

Section A-A
(Closed position)

B   C

A

Equal internal visible opening
Dimension dependent
on internal finishes

7 1/2"

Equal internal visible opening
Dimension dependent
on internal finishes

CURB WIDTH

A   A

Section A-A
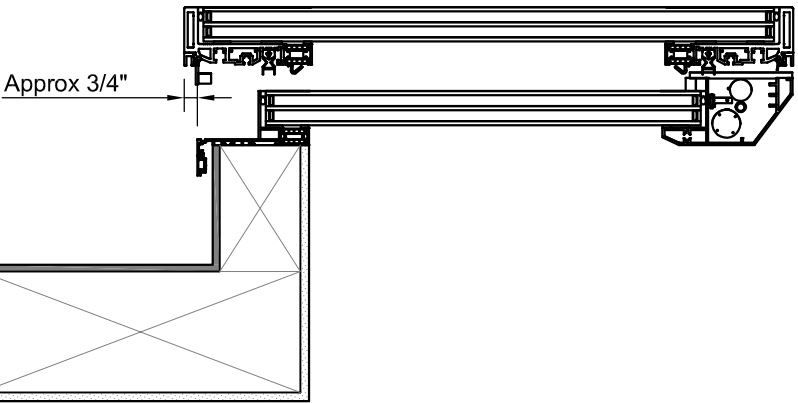(Open position)

Approx 3/4"
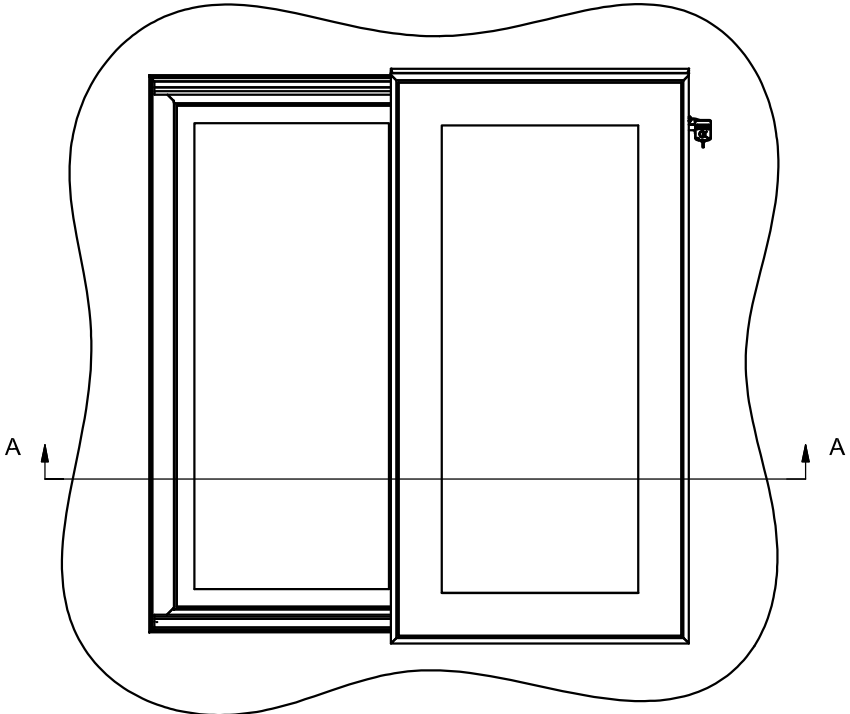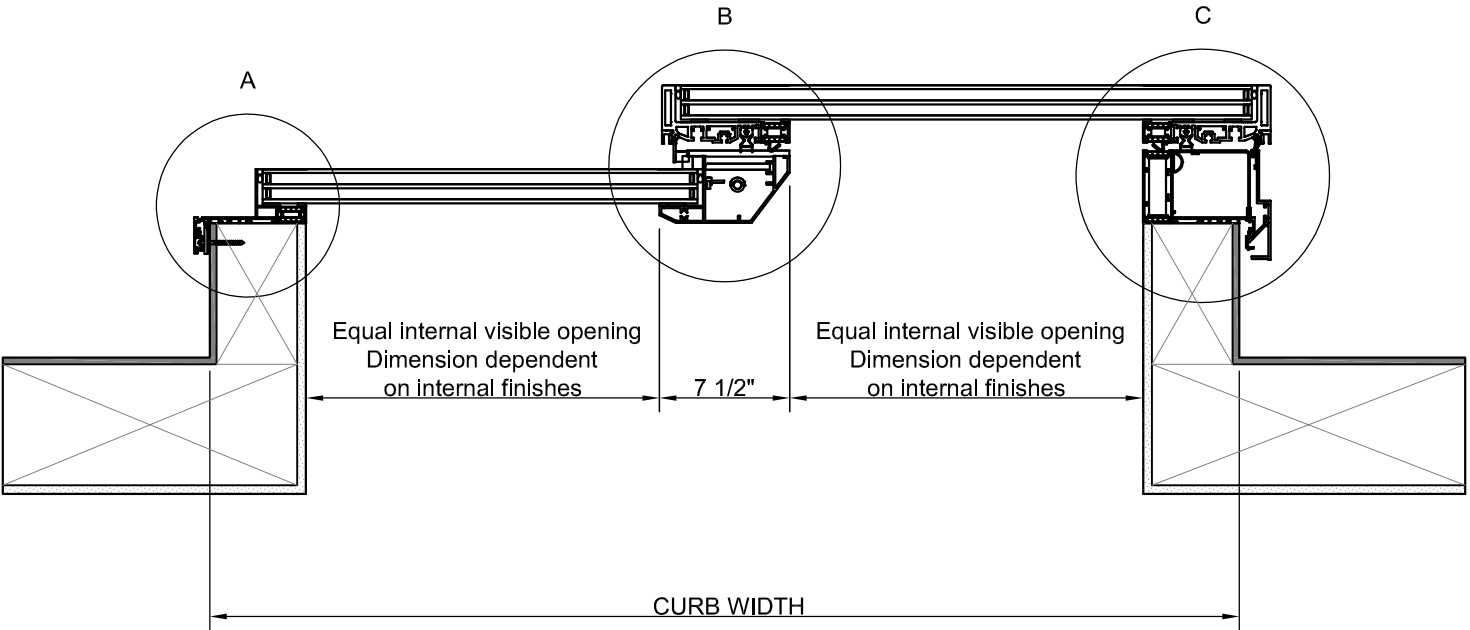
Factory applied low modulus neutral cure silicone
(standard = matt black) with polyethylene expanded foam backing rod

Powder coated external framework
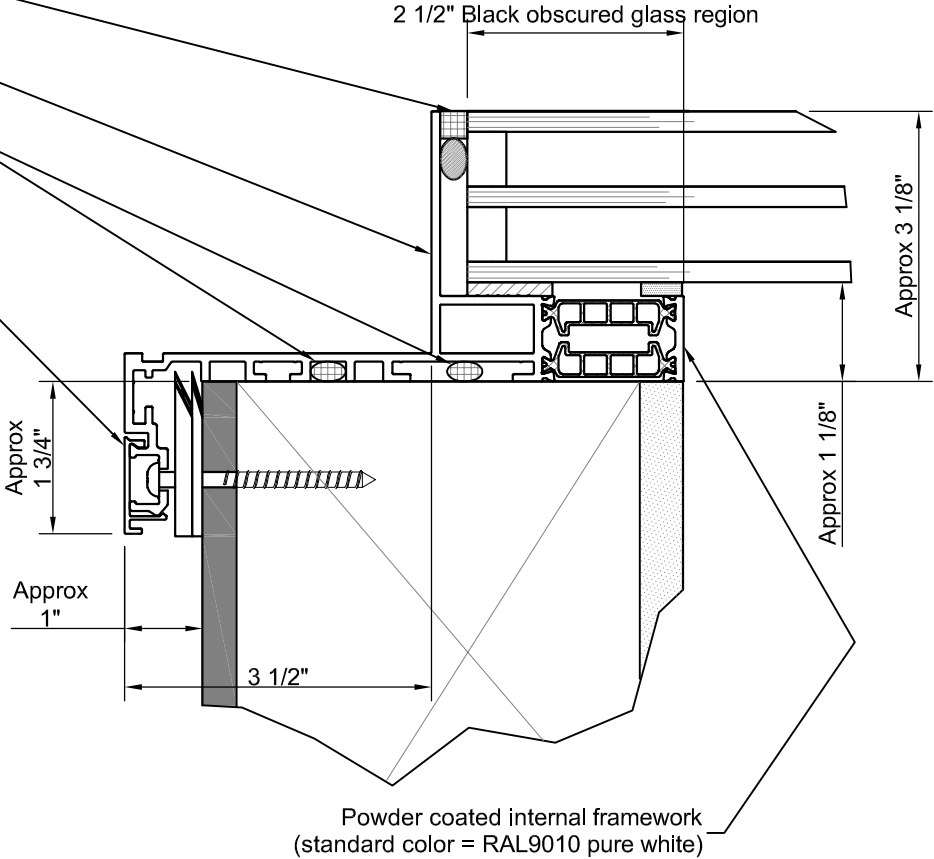(standard = RAL7015 slate grey)

Site applied silicone seal (supplied by Glazing Vision)

Polyester powder coated aluminum clip on cover
concealing structural stainless steel curb fixing
with packers (supplied by Glazing Vision)

Detail A

2 1/2" Black obscured glass region

Approx 3 1/8"

Approx 1 1/8"

Approx
1 3/4"

Approx
1"

3 1/2"

Powder coated internal framework
(standard color = RAL9010 pure white)

ESTIMATED WEIGHT		SCALE	
N/A		Not to scale (UNLESS OTHERWISE STATED)	
REVISION	DESCRIPTION		NAME/DATE
-	Initial Release		JSL 13/Nov/2020

PROJECT
Sliding Over Fixed

TITLE / DESCRIPTION
Triple Glazed Section Through Width

CHECKED
AB

DRAWING NO.
603-SDD-US-004

SHEET
1 OF 1