


**GV Standard Pitchridge
Small Frame**

Used for glazing between 1-1/4" and 1-3/8" mm in thickness
(typically double glazed units)

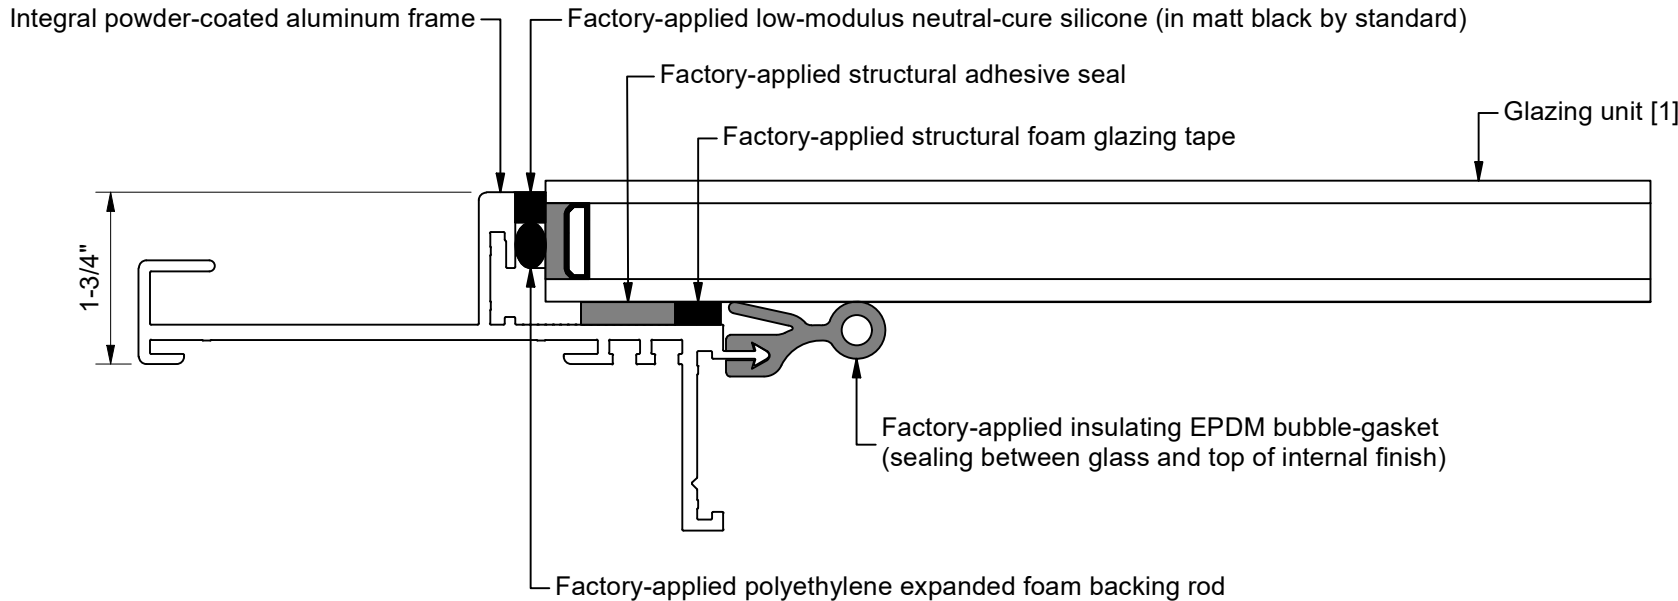

For general arrangements, see GV drawing
203-SDD-US-001 - Shop Drawing

For more dimensional details, see GV drawings
203-SDD-US-003 - General Dimensions
203-SDD-US-004 - Curb Dimensions

**GLAZING
VISION**
the glass skylight company

☎: 833-SKYDOOR
🌐: www.glazingvision.com
✉: sales@glazingvision.com

IT IS GLAZING VISION'S POLICY TO CONTINUOUSLY DEVELOP AND IMPROVE OUR PRODUCTS. WE THEREFORE RESERVE THE RIGHT TO MODIFY OR CHANGE THE DETAIL DESIGN AT OUR DISCRETION AND WITHOUT PRIOR NOTICE.

THIS DRAWING IS COPYRIGHT AND THE SOLE PROPERTY OF GLAZING VISION LTD. THE DESIGNS / INFORMATION IT CONTAINS ARE PRIVATE AND CONFIDENTIAL. IT MUST NOT BE COPIED, EXHIBITED OR COMMUNICATED TO THIRD PARTIES FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS ISSUED WITHOUT THE WRITTEN PERMISSION OF GLAZING VISION LTD.


ALL DIMENSIONS IN **INCHES** UNLESS OTHERWISE STATED

CURB TO BE CONSTRUCTED TO WITHIN $\pm 3/8"$ ON STRAIGHT & $\pm 1/2"$ ON DIAGONAL DESIGNED SIZES. WEATHERING BY OTHERS.

THIS IS A STANDARD DRAWING. THE UNIT PURCHASED MAY VARY. THIS DRAWING DOES NOT INDICATE ACCURATE DIMENSIONS FOR ANY EXISTING STRUCTURAL COMPONENTS OR PRODUCTS.

DO NOT USE THIS DRAWING FOR ANY SITE LAYOUTS. ON-SITE PERSONNEL ARE RESPONSIBLE TO CONFIRM DRAWINGS VS SPECIFIC SITE CONDITIONS.


ALL PRODUCTS MANUFACTURED TO 1/8" BY COMPONENT. OVERALL TOLERANCE NO MORE THAN 1/1000 OF TOTAL SIZE TO THE NEXT 1/8".



THIRD ANGLE PROJECTION UNLESS OTHERWISE STATED.

**GV Standard Pitchridge
Large Frame**

Used for glazing between 1-15/16" and 2-1/16" in thickness
(typically triple glazed units)

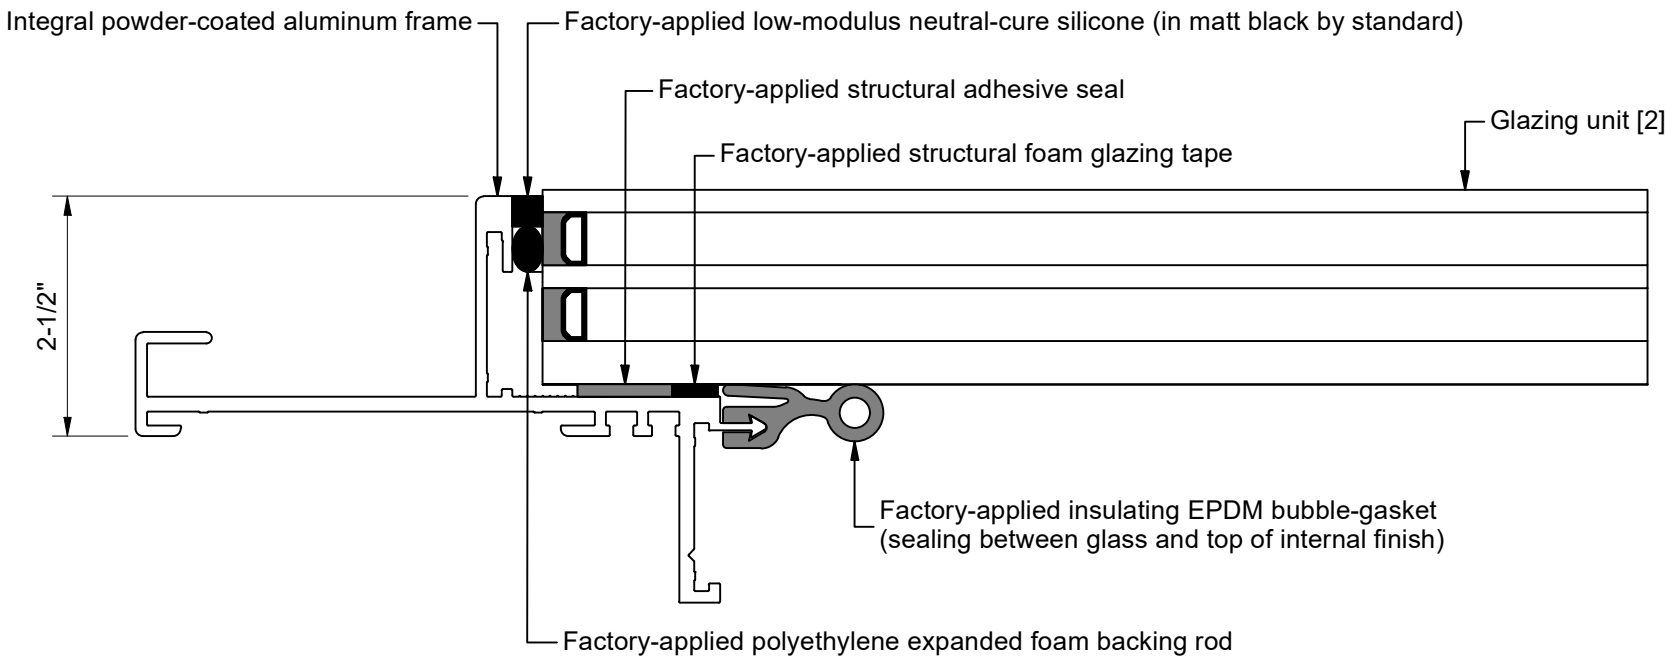

[1] Example glazing unit: Toughened double glazed unit
- 1/4" HST toughened outer pane
- 5/8" argon-filled cavity, black warm edge spacer
- 1/4" HST toughened soft coat low-E inner pane

[2] Example glazing unit: HS laminated triple glazed unit
- 1/4" HST toughened soft coat low-E outer pane
- 9/16" argon-filled cavity, black warm edge spacer
- 1/4" HST toughened soft coat low-E mid pane
- 9/16" argon-filled cavity, black warm edge spacer
- 1/2" HS-laminated inner pane

ESTIMATED WEIGHT	N/A	SCALE	N/A
		(UNLESS OTHERWISE STATED)	

REVISION	DESCRIPTION	NAME/DATE
-	Initial Release	RJ 14 Jul 2022

PROJECT Pitchridge	
TITLE / DESCRIPTION General Arrangement Drawing General Components	CHECKED
DRAWING NO. 203-SDD-US-002	SHEET 1 OF 1